


## SF-1F 自润滑卷制翻边轴承标准公制尺寸 SF-1F Self-Lubricating Flanged Bearing Standard Metric Size

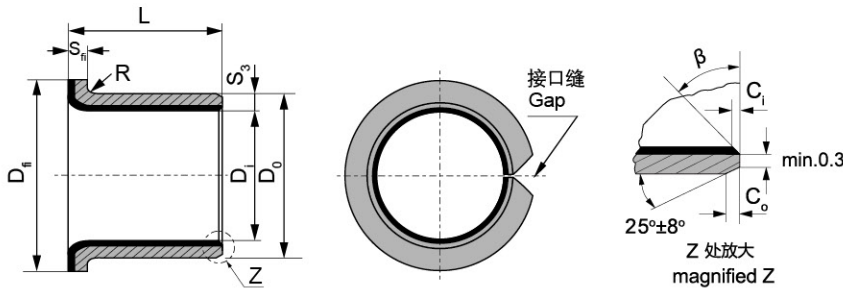

S <sub>3</sub>	1.0	1.5	2.0	2.5
R	1 <sup>-0.5</sup>	1±0.5	1.5±0.5	2±0.5

单位Unit: mm

轴径(f7) Shaft D <sub>s</sub>	座孔(H7) Housing D <sub>H</sub>	(OD) 外径公差 Tolerance D <sub>o</sub>	(ID)压装后 内孔公差 After assembled D <sub>i</sub>	配合间隙 Clearance C <sub>o</sub>	Designation 型号规格	Wall thickness 壁厚 S <sub>3</sub>	尺寸 Dimension						
							D <sub>i</sub>	D <sub>o</sub>	D <sub>H</sub> ±0.5	L±0.25	S <sub>H</sub> -0.2		
6	-0.013 -0.028	8	+0.015	8	+0.055 +0.025	6.055 5.990	0.077 0.000	SF-1F06040	6	8	12	4	1
												7	
8	-0.013 -0.028	10	+0.015	10	+0.055 +0.025	8.055 7.990	0.083 0.003	SF-1F08055 SF-1F08075	8	10	15	5.5	1
												7.5	
10	-0.016 -0.034	12	+0.018	12	+0.055 +0.025	10.058 9.990	0.086 0.003	SF-1F10070 SF-1F10090 SF-1F10120	10	12	18	7	1
												9	
												12	
12	-0.016 -0.034	14	+0.018	14	+0.065 +0.030	12.058 11.990	0.092 0.006	SF-1F12070 SF-1F12090 SF-1F12120	12	14	20	7	1
												9	
												12	
												17	
14	-0.016 -0.034	16	+0.018	16	+0.065 +0.030	14.058 13.990	0.092 0.006	SF-1F14120 SF-1F14170	14	16	22	12	1
												17	
												9	
15	-0.016 -0.034	17	+0.018	17	+0.065 +0.030	15.058 14.990	0.092 0.006	SF-1F15090 SF-1F15120 SF-1F15170	15	17	23	9	1
												12	
												17	
16	-0.016 -0.034	18	+0.018	18	+0.065 +0.030	16.058 15.990	0.092 0.006	SF-1F16120 SF-1F16170	16	18	24	12	1
												17	
18	-0.016 -0.034	20	+0.021	20	+0.075 +0.035	18.061 17.990	0.095 0.006	SF-1F18120 SF-1F18170 SF-1F18200	18	20	26	12	1
												17	
												20	
20	-0.020 -0.041	23	+0.021	23	+0.075 +0.035	20.071 19.990	0.112 0.010	SF-1F20115 SF-1F20165 SF-1F20215	20	23	30	11.5	1.5
												16.5	
												21.5	
22	-0.020 -0.041	25	+0.021	25	+0.075 +0.035	22.071 21.990	0.112 0.010	SF-1F22150 SF-1F22200	22	25	32	15	1.5
												20	
												11.5	
25	-0.020 -0.041	28	+0.021	28	+0.075 +0.035	25.071 24.990	0.112 0.010	SF-1F25115 SF-1F25165 SF-1F25215	25	28	35	16.5	1.5
												21.5	
												11.5	
30	-0.025 -0.050	34	+0.025	34	+0.075 +0.035	30.085 29.990	0.126 0.010	SF-1F30160 SF-1F30260	30	34	42	16	2
												26	
35	-0.025 -0.050	39	+0.025	39	+0.085 +0.045	35.085 34.990	0.135 0.015	SF-1F35160 SF-1F35260	35	39	47	16	2
												26	
												26	
40	-0.025 -0.050	44	+0.025	44	+0.085 +0.045	40.085 39.990	0.135 0.015	SF-1F40260 SF-1F40400	40	44	53	26	2
												40	